

Valva refulare

VR



Detalii constructive. Utilizare.

Valva refulare cu debit reglabil (parte centrala concava ajustabila), prevazuta cu rama de montaj.

Refulare / introducere, uzual pentru spatii de mici dimensiuni (grupuri sanitare, spatii de depozitare, arhive etc.).
Montaj pe plafon sau perete.

Material.

Aluminiu / otel.

Finisaj.

Finisaj standard: alb RAL9016.

Finisaj optional: diverse nuante RAL (cost suplimentar).

Montaj. Fixare.

Montaj pe plafon (in interior).

Fixare cu ajutorul ramei de montaj (inclusa).


Cod comanda: VR aaa

Cod produs


diametru racord Ød (mm)

nespecificat - alb RAL9016 (standard)

RALxxxx - cod RAL optional

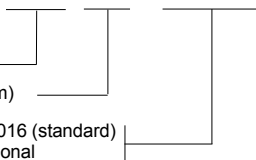

Date tehnice

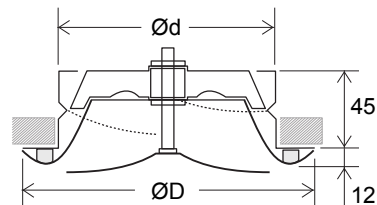


Dimensiuni

Ød	ØA	Q (m ³ /h) @ Vef 3 (m/s)
100	137	90
125	164	150
150	202	200
160	212	200
200	248	250

Nu sunt disponibile alte dimensiuni.

Fixare.

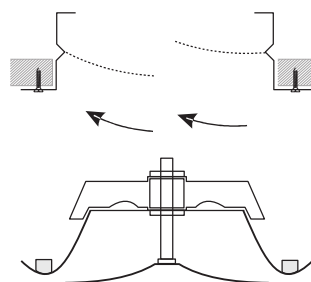


Fixare rama.

Montaj corp valva
prin insurubare.


Valva refulare

VR


Date tehnice

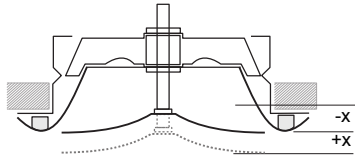


VR 100

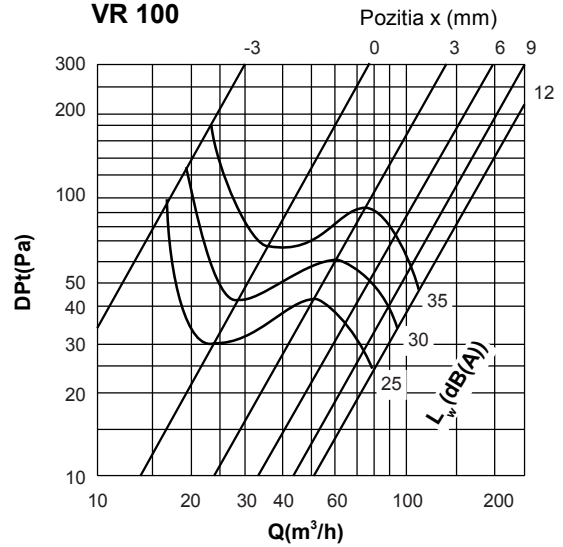


VR 125

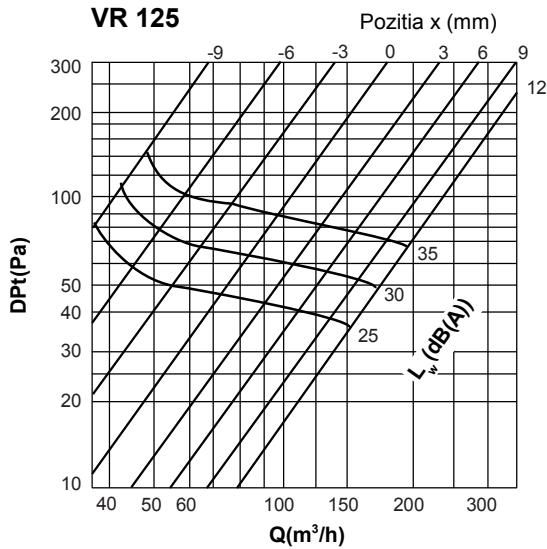

VR 150

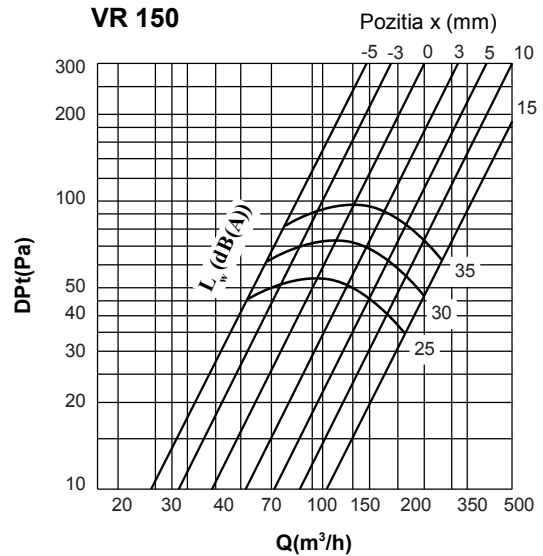

VR 160

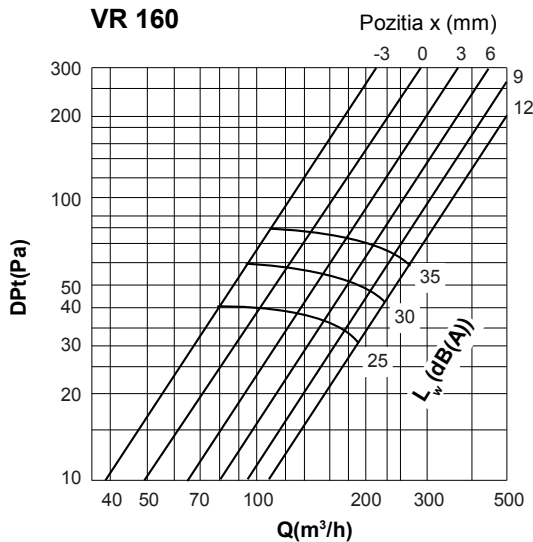

VR 200

